




FLORY FIELD ELEVATORS 4840 AND 4890

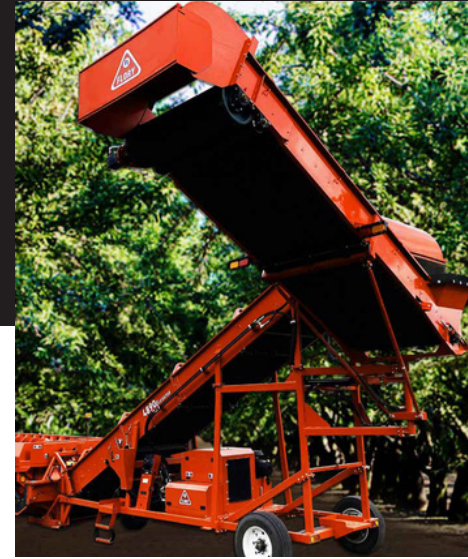

FEATURES

- High capacity 48 in. wide belt with variable speed,
- minimizes unload time, which maximizes shuttle efficiency
- Automatic engine speed and belt start actuated by shuttle trigger
- Powered drive wheel allows for easy movement and positioning
- Adjustable output hood centers the load in the trailer without repositioning
- Large unload area and smooth transition from the shuttle prevents loss and damage to the product
- The 180° swivel on the 4890 is actuated by a simple hydraulic cylinder and linkage with
- maintenance-free bushings, which results in smooth motion and ease of service

OPTIONS

- 48" WIDE FIELD ELEVATOR "SHORT NOSE" STD w/Pwr Dr Wh -NON CLEATED
- 48" WIDE FIELD ELEVATOR "SHORT NOSE" STD w/Pwr Dr Wh -CLEATED
- 48" WIDE FIELD ELEVATOR "90 DEGREE" STD w/Pwr Dr Wh -NON CLEATED
- 48" WIDE FIELD ELEVATOR "90 DEGREE" STD w/Pwr Dr Wh -CLEATED


Suitable Crops



- Wireless remotes allow control of elevator functions by the ground crew or
- directly from the cab of the shuttle
- Trough mounted E-stop, work lights and flashing light tower enhances operator safety
- Suspension axle, integrated brakes and LED lighting improves towing safety
- Cyclone hydraulic tank technology, reduces
- oil requirement by 25 gallons



**SIMPLE BELT
TENSION
AND ALIGNMENT
SYSTEM
AT GROUND LEVEL**



**WIRELESS
REMOTES**

**TRANSPORT
POSITION**



SPECIFICATIONS

ENGINE	CAT, 3.6 L,
HORSEPOWER	TIER 4F 74 HP
FUEL TYPE	DIESEL #2, ULTRA LOW SULF
FUEL CAPACITY	140 L (37 GAL)
NO DEF REQ.	45 L (12 GAL)
HYD. OIL CAPACITY	122 CM (48 IN)
BELT WIDTH	REAR: 235 - 75R - 17.5, 18 PLY
TIRES	4840 DRIVE: 18 X 7.00 - 8, 16 PLY
	4890 DRIVE: 26 X 12.00 - 12, 10 PLY
4840 WEIGHT	4,055 KG (8,940 LBS)
4890 WEIGHT	5,270 KG 11,620 (LBS)